CRT ADAPTER

BK PRECISION

MODEL CR-44

ASSEMBLY WITH WIRES — 527-105-9-001

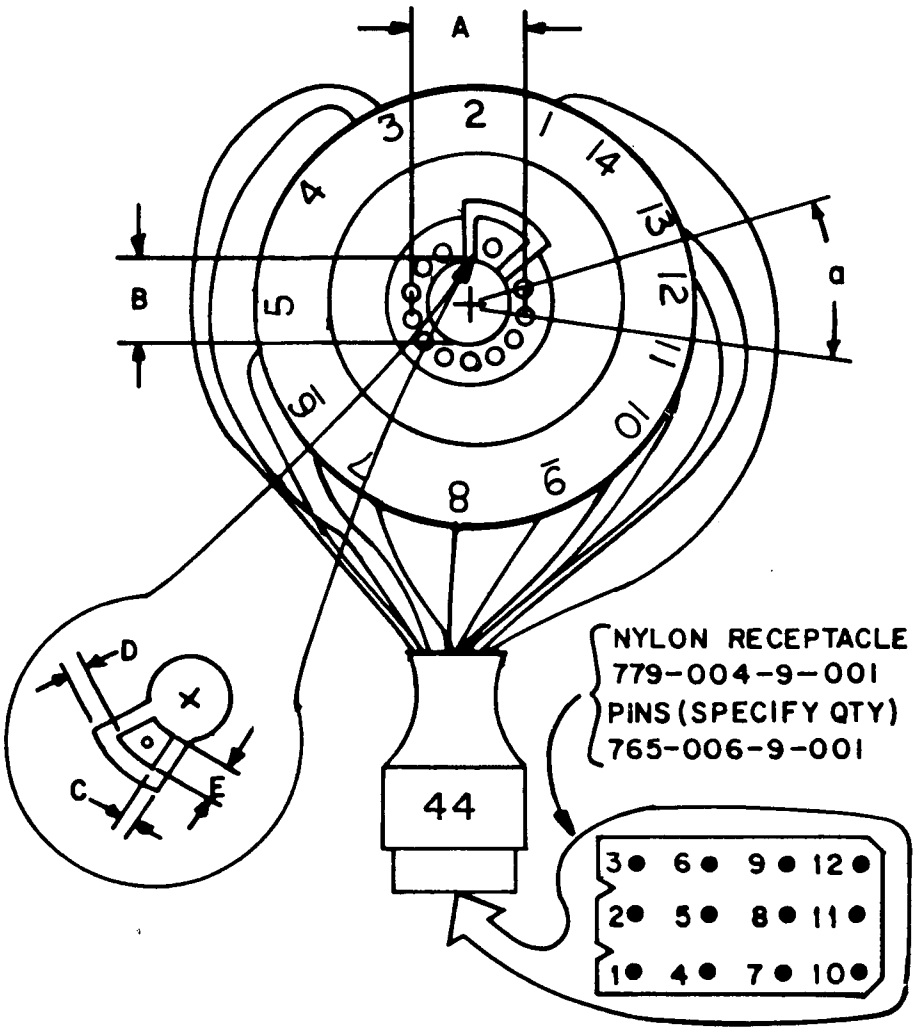

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEP-TACLE
1	BLK	12
2	keyway	---
3	WHT/BLU	11
4	YEL/BLU	5
5	YEL/GRN	8
6	GRN	10
7	YEL/RED	1
8	RED	7
9	WHT	2
10	BRN	4
11	BLU	6
12	WHT/RED	3
13	WHT/GRN	9
14	keyway	---

FITS CRT DIMENSIONS:

A = pin circle diameter	= 15.24 mm/0.600" nom.
a = angular pin spacing	= 25-5/7°
B = post diameter	= 11.0 mm/0.433" max.
C = keyway width	= 1.52 mm/0.060" nom.
D = keyway width	= 1.27 mm/0.050" nom.
E = keyway depth	= 5.59 mm/0.220" min.

BK PRECISION
Maxtec International Corporation
6470 West Cortland Street
Chicago, Illinois 60635
Telephone: (312) 889-1448

Used with B & K-Precision Models: 467, 470

TUBE TYPE	HEATER VOLTAGE
670CRB22	6.3

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-PRECISION, Factory Service Department
Maxtec International Corporation
6470 West Cortland Street
Chicago, Illinois 60635
Telephone: (312) 889-1448

For information on ordering a subscription.

BK PRECISION

6470 West Cortland Street
Chicago, Illinois 60635

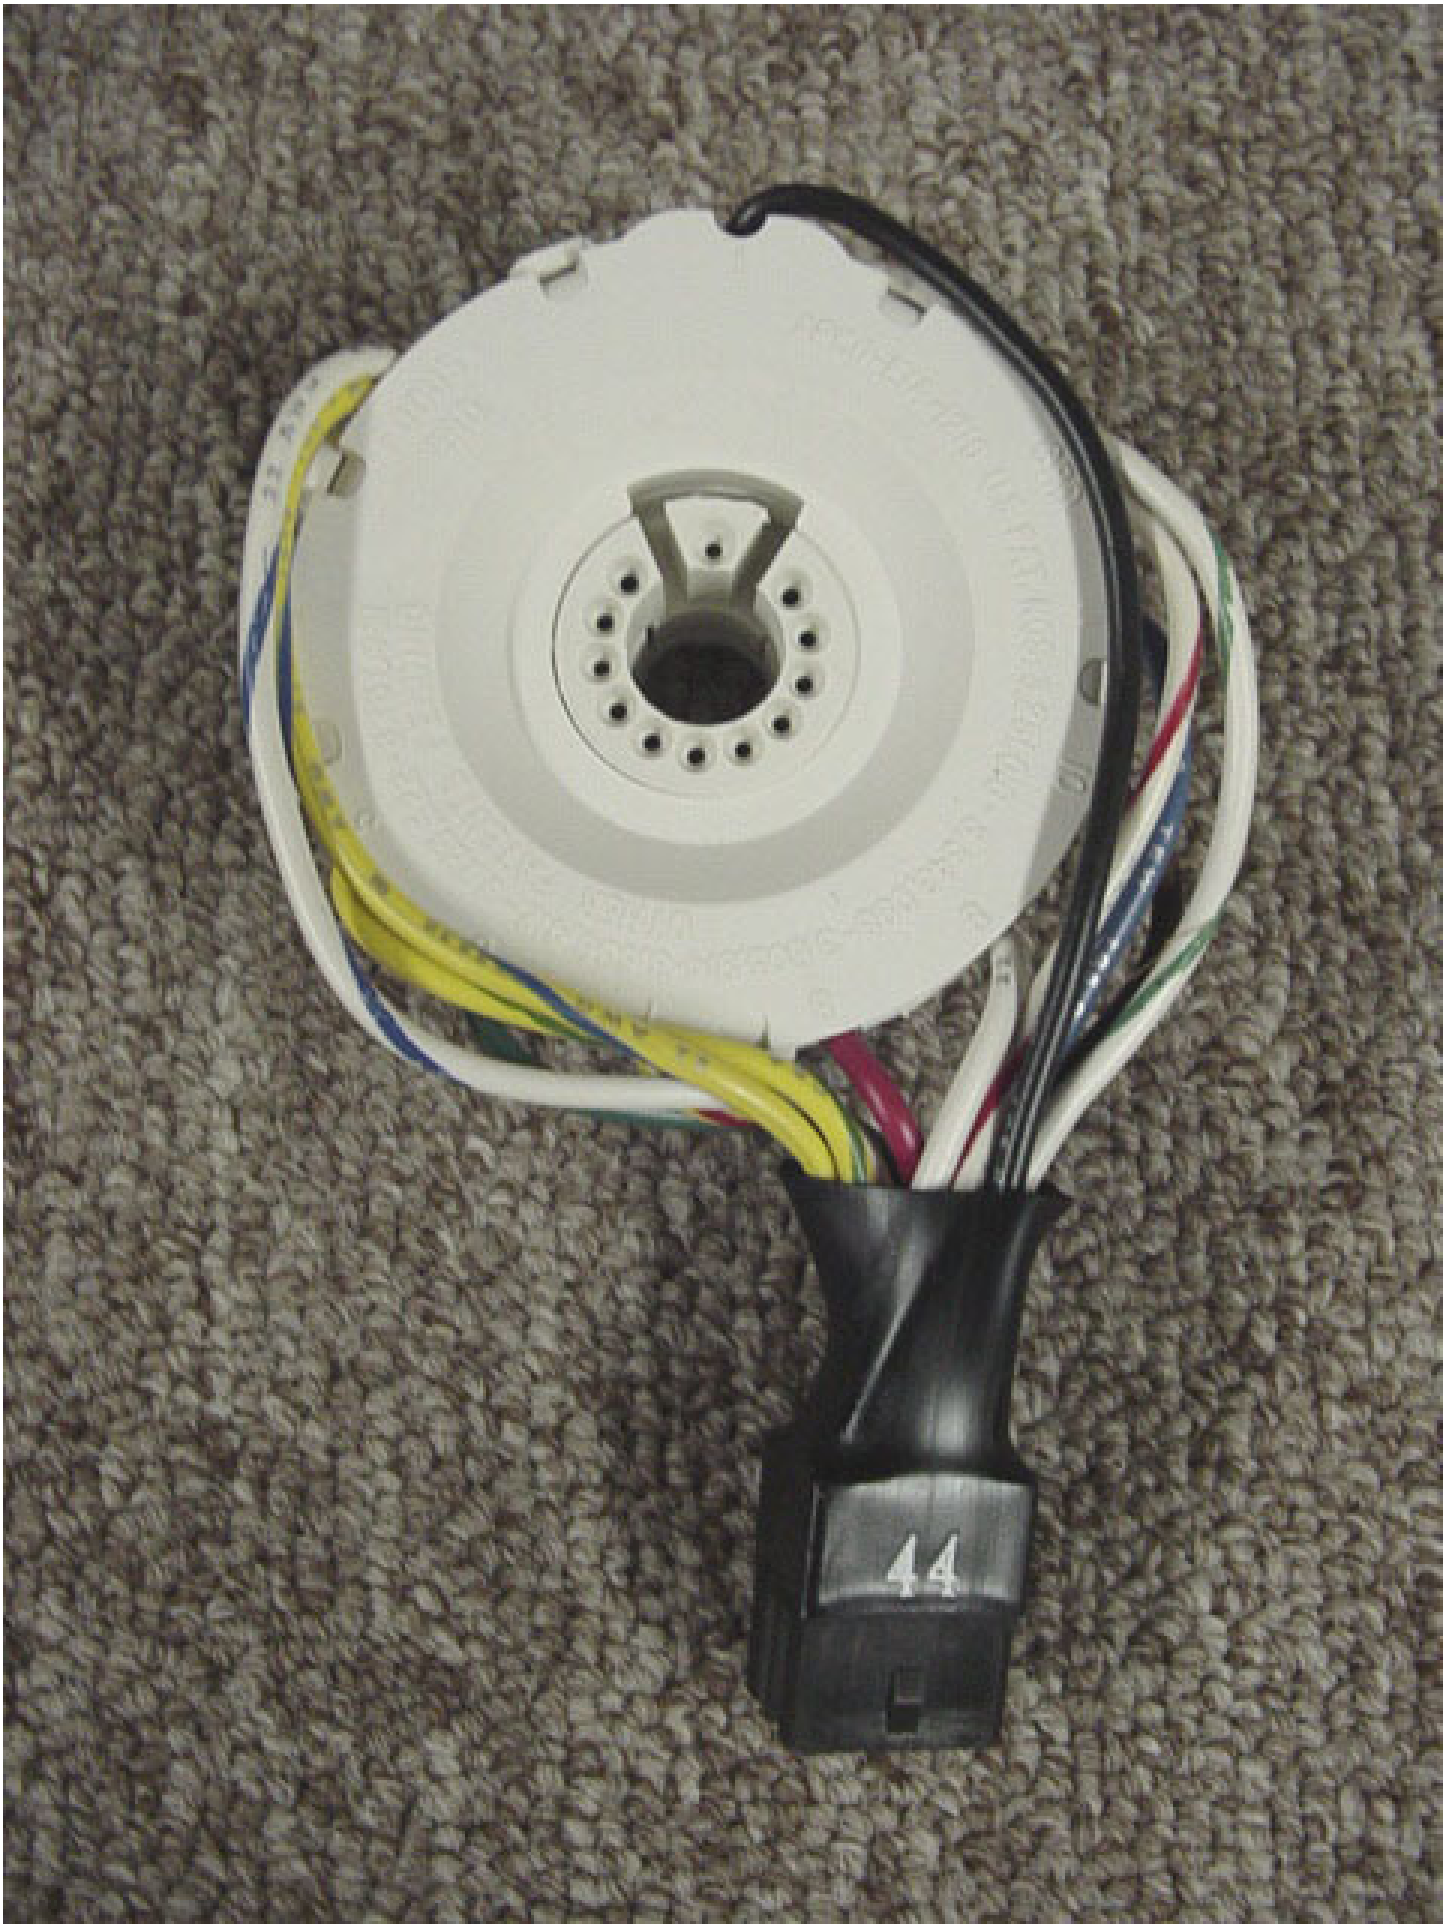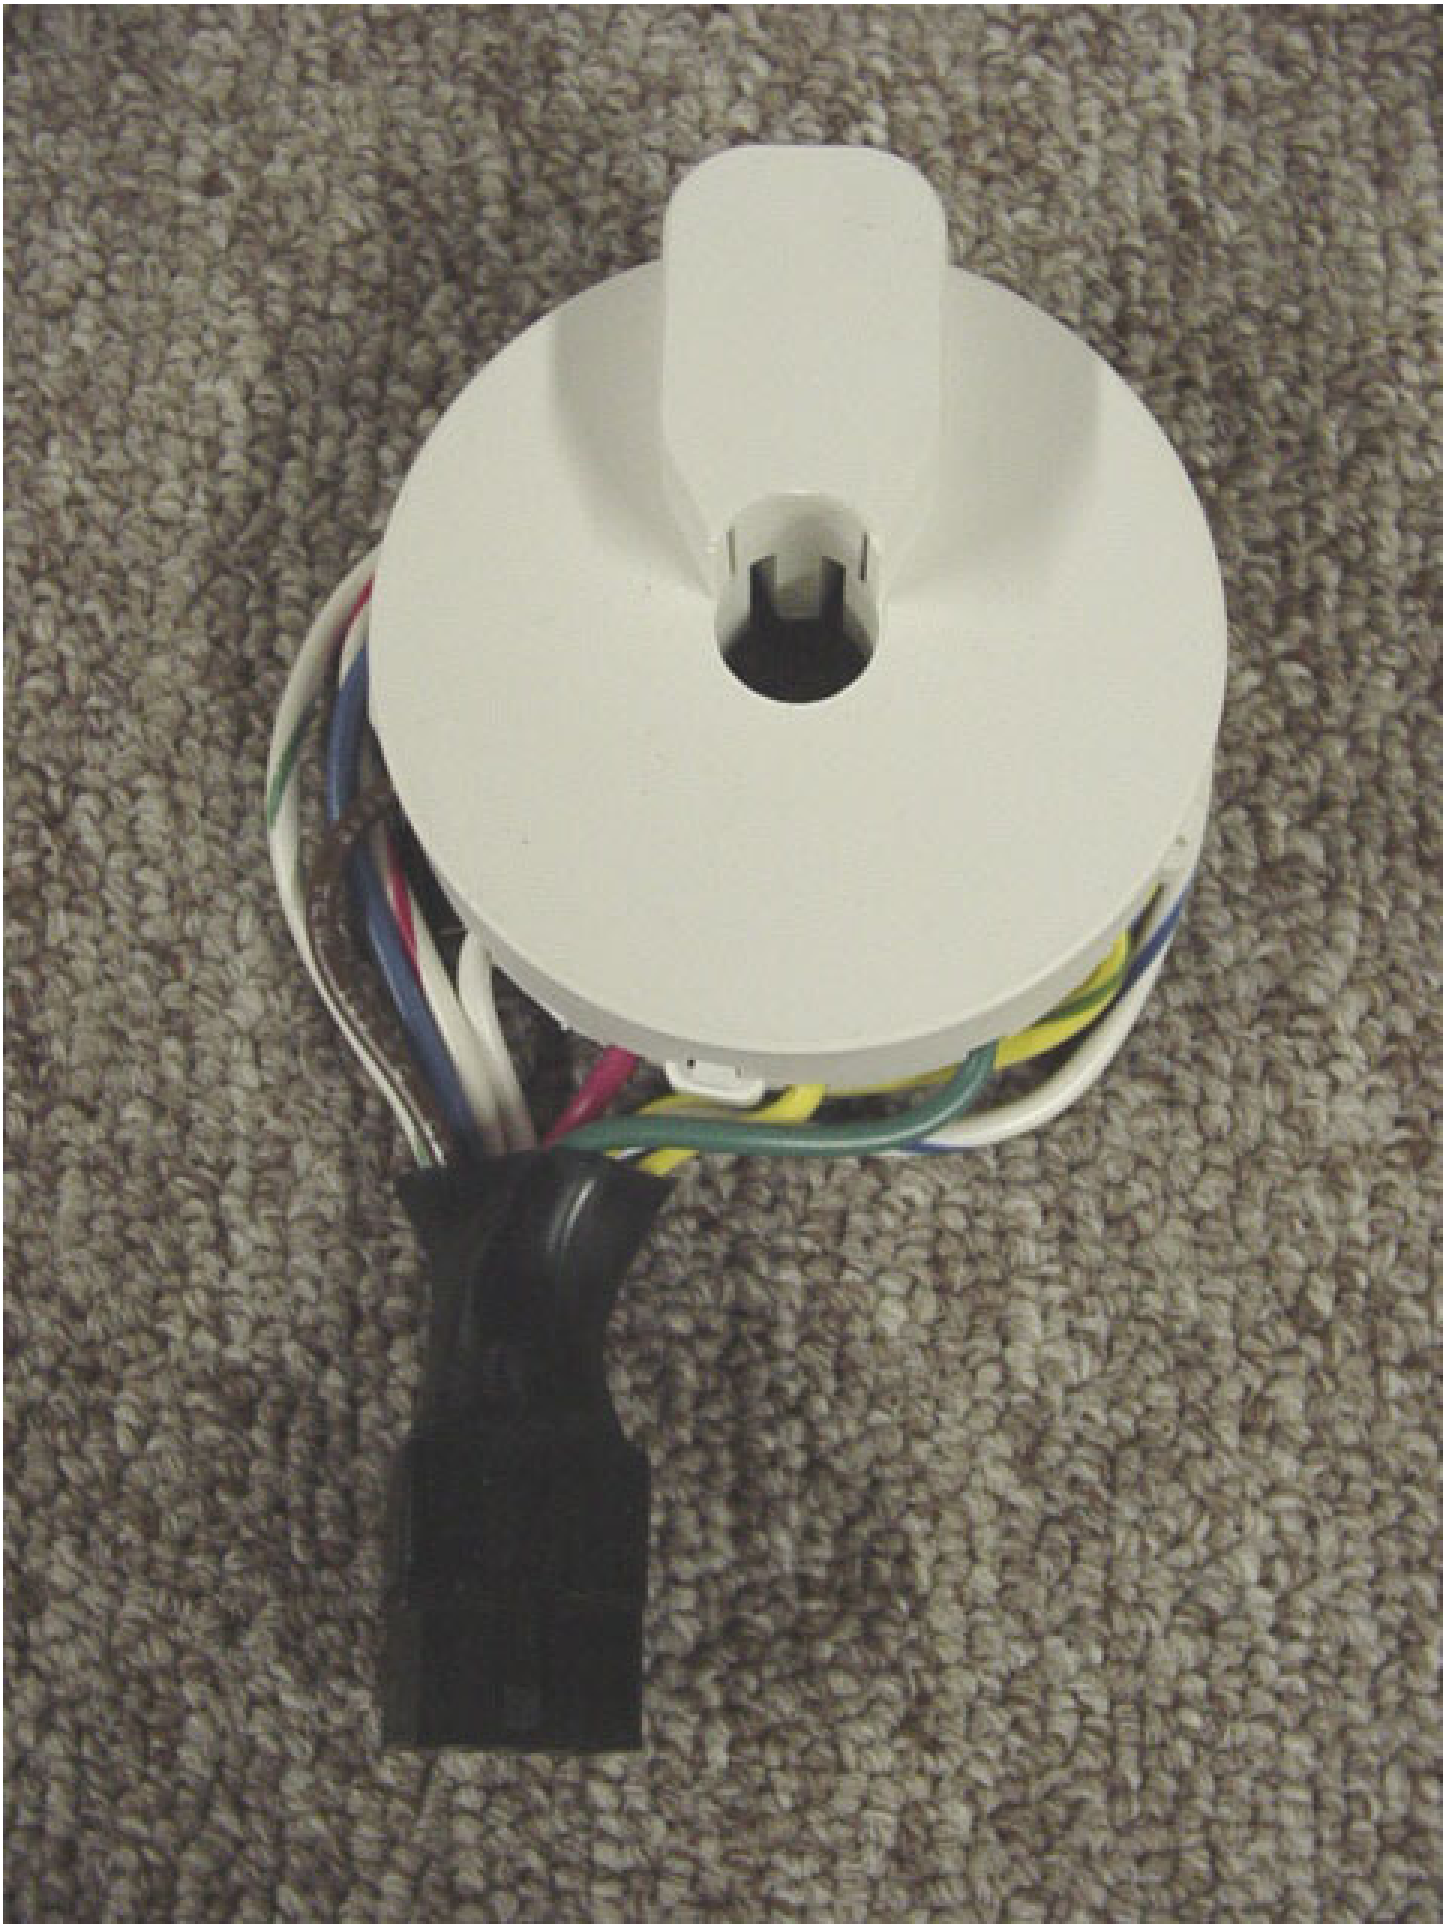
44